





## Diagram A

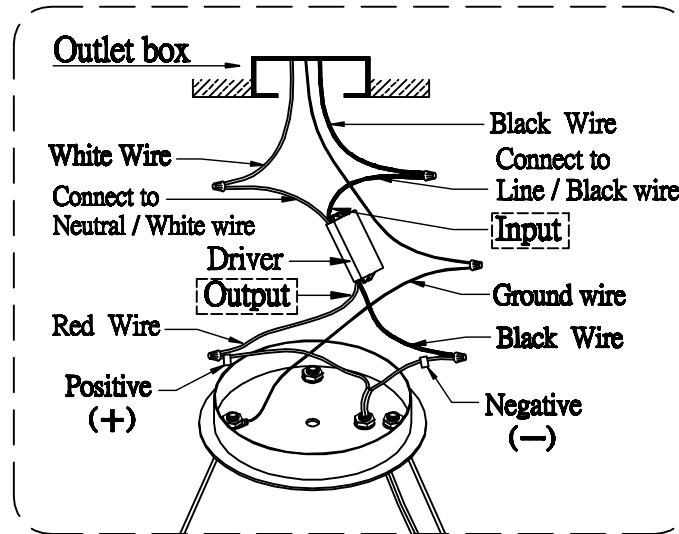

Turn off power at breaker for outlet fixtures is being installed to.

## Diagram B

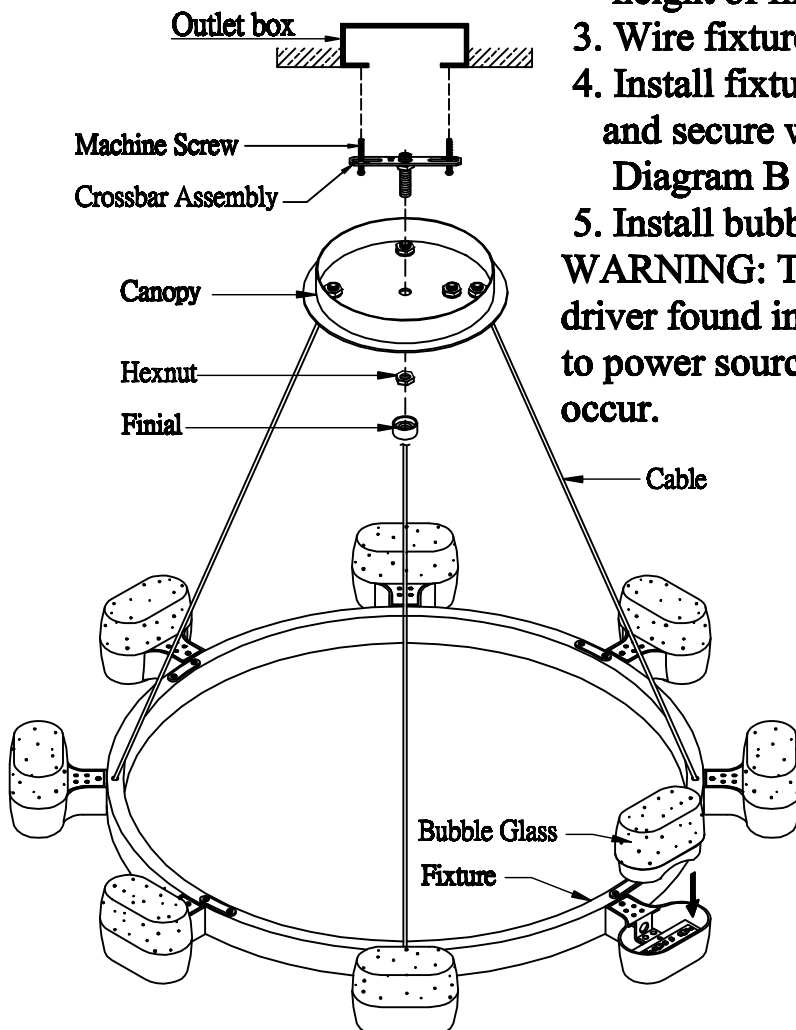

1. Install Crossbar Assembly to outlet box using Machine screw
2. Adjust length of the Cables to your desire height of fixture
3. Wire fixture assembly per Diagram A
4. Install fixture assembly to Crossbar assembly and secure with Hex Nut, and finials per Diagram B
5. Install bubble glass into glass holder

**WARNING:** These wires need to be connected to driver found in the canopy. Do not connect directly to power source or a Blowout/Shortcircuit might occur.