




Diagram A

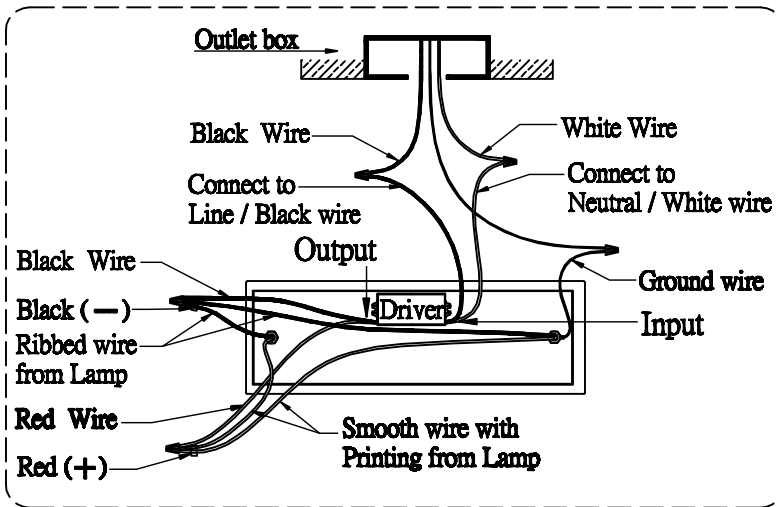

Turn off power at breaker for outlet fixtures is being installed to.

1. Install backplate to outlet box using (screw 2)
2. Mark for holes for wall anchors
3. Remove backplate from outlet box
4. Drill 3/16" holes at marked locations
5. Insert wall anchors into drilled holes
6. Re-install backplate to outlet box using (screw 2)
7. Insert wood screws into wall anchors and tighten to secure
8. Assemble the fixture per Diagram B.
9. Add 6" and 12" rod to the fixture to your desire height
10. Wire fixture assembly per Diagram A
11. Install fixture assembly to Backplate and secure with finials

11. Install bubble glass into glass holder
WARNING: These wires need to be connected to driver found in the canopy.
 Do not connect directly to power source or a Blowout/Shortcircuit might occur.

Diagram B

