

ELKAY® SPECIFICATIONS

Lustertone® Single Bowl Sink made with CuVerro® Antimicrobial Copper Models LR and DLR Series

GENERAL

Highest quality sink bowl formed of #18 (1.2mm) gauge, CuVerro antimicrobial copper that combines beauty and performance. It represents the only class of solid surface material registered with the EPA for its inherent ability to kill infectious bacteria.* Top mount.

DESIGN FEATURES

Bowl Depth: See chart on next page.

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Bowl and Faucet Deck Recessed: 3/16" (5mm) below outside edge of sink.

Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

Underside: Fully undercoated to reduce condensation and dampen sound. DLR191910 underside is fully protected by heavy duty Sound Guard® undercoating.

OTHER

Drain Opening: 3-1/2" (89mm).

NOTE: Unless otherwise specified, models with one, two, three or OS4 faucet hole option are furnished with 3 faucet holes as shown; models with choice of one, two, three, four, or five faucet hole option are furnished with 4 faucet holes standard.

These sinks comply with IGC-194.



This sink is listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.



OPTIONAL ACCESSORIES

Drains: LKVR18-CU.

*Testing demonstrates effective antibacterial activity against Methicillin-Resistant Staphylococcus aureus, Staphylococcus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. Coli O157:H7.

Purchaser is aware and informed that the Elkay sink being purchased is made up of a copper-nickel alloy. Some literature reports that some persons may have allergic reactions when exposed to nickel-containing substances. Purchaser should insure that reasonable precautions are taken in this regard. Elkay and purchaser agree that should a claim or litigation arise wherein a person is seeking damages due to an alleged allergic reaction to these substances, that purchaser will indemnify, defend and hold harmless Elkay for any damages and the costs of litigation for any such claim.


U-Channel Type Mounting System

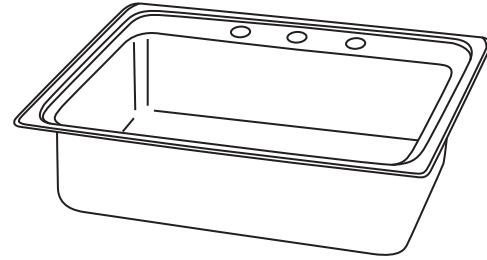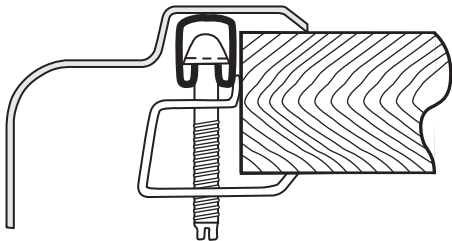

Model LR22193-CU



HOLE DRILLING CONFIGURATIONS

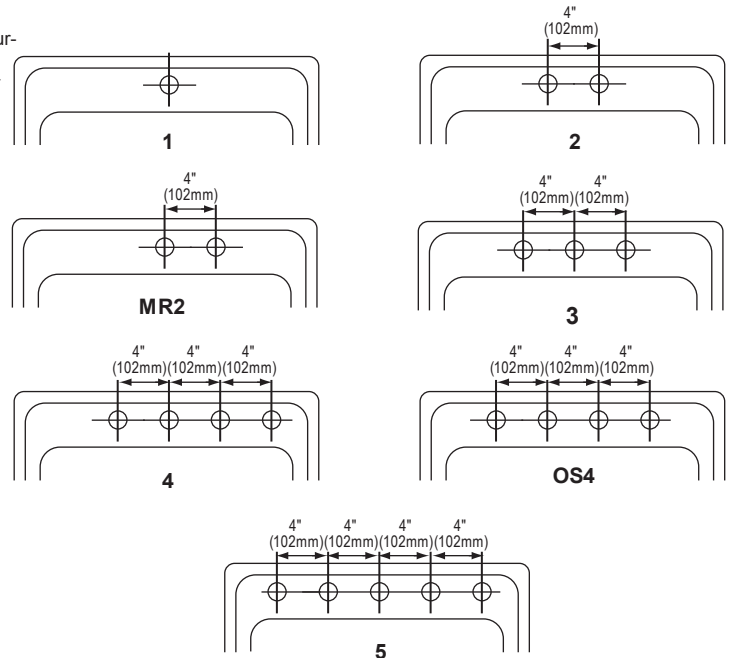

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay

elkayusa.com

2222 Camden Court
Oak Brook, IL 60523

Printed in U.S.A.

©2012 Elkay

(9/12)

1-473

Lustertone® Single Bowl Sink made with CuVerro® Antimicrobial Copper Models LR and DLR Series

ELKAY® SPECIFICATIONS

SINK DIMENSIONS*

Model Number	Overall		Inside Bowl			Cut out in Countertop [1-1/2" (38mm) Radius Corners]		No. of 1-1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	3-1/2" Drain Opening	Minimum Cabinet Size
	L	W	L	W	D	L	W			
	A	B	C	D	E	L	W			
LR1316-CU	13 (330mm)	16 (406mm)	10 (254mm)	10 (254mm)	7-5/8 (194mm)	12-3/8 (321mm)	15-3/8 (391mm)	1, 2, MR2 or 3	Centered	18 (457mm)
LR1522-CU	15 (381mm)	22 (559mm)	11-1/2 (292mm)	16 (406mm)	7-5/8 (194mm)	14-3/8 (371mm)	21-3/8 (543mm)	1, 2, MR2 or 3	Centered	18 (457mm)
LR1722-CU	17 (432mm)	22 (559mm)	13-1/2 (343mm)	16 (406mm)	7-5/8 (194mm)	16-3/8 (422mm)	21-3/8 (543mm)	1, 2, MR2, 3 or OS4	Centered	21 (533mm)
DLR172210-CU	17 (432mm)	22 (559mm)	13-1/2 (343mm)	16 (406mm)	10-1/8 (257mm)	16-3/8 (422mm)	21-3/8 (543mm)	1, 2, MR2, 3 or OS4	Centered	21 (533mm)
LR1918-CU	19 (483mm)	18 (457mm)	16 (406mm)	11-1/2 (292mm)	7-5/8 (194mm)	18-3/8 (467mm)	17-3/8 (441mm)	1, 2, MR2, 3 or OS4	Centered	24 (610mm)
LR1919-CU	19-1/2 (495mm)	19 (483mm)	16 (406mm)	13-1/2 (343mm)	7-5/8 (194mm)	18-7/8 (479mm)	18-3/8 (467mm)	1, 2, MR2, 3 or OS4	Centered	24 (610mm)
DLR191910-CU	19-1/2 (495mm)	19 (483mm)	16 (406mm)	13-1/2 (343mm)	10-1/8 (257mm)	18-7/8 (479mm)	18-3/8 (467mm)	1, 2, MR2, 3 or OS4	Centered	24 (610mm)
LR2022-CU	19-1/2 (495mm)	22 (559mm)	16 (406mm)	16 (406mm)	7-5/8 (194mm)	18-7/8 (479mm)	21-3/8 (543mm)	1, 2, MR2, 3 or OS4	Centered	24 (610mm)
DLR202210-CU	19-1/2 (495mm)	22 (559mm)	16 (406mm)	16 (406mm)	10-1/8 (257mm)	18-7/8 (479mm)	21-3/8 (543mm)	1, 2, MR2, 3 or OS4	Centered	24 (610mm)
LR2219-CU	22 (559mm)	19-1/2 (495mm)	18 (457mm)	14 (356mm)	7-5/8 (194mm)	21-3/8 (543mm)	18-7/8 (479mm)	1, 2, MR2, 3, 4 or 5	Centered	27 (686mm)
DLR221910-CU	22 (559mm)	19-1/2 (495mm)	18 (457mm)	14 (356mm)	10-1/8 (257mm)	21-3/8 (543mm)	18-7/8 (479mm)	1, 2, MR2, 3, 4 or 5	Centered	27 (686mm)
LR2222-CU	22 (559mm)	22 (559mm)	19 (483mm)	16 (406mm)	7-5/8 (194mm)	21-3/8 (543mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4 or 5	Centered	27 (686mm)

*Length is left to right. Width is front to back.

