



CONSOLE SINK

BEFORE INSTALLING

Read entire Console Sink Installation Instructions. Observe all local building and safety codes.


INSTRUCTIONS

Unpack and inspect the product for any shipping damages. If you find damages, do not install. Contact Customer Service at 1-866-855-2284. If you need assistance or have questions while installing your sink, contact Customer Service.

Because wall construction and materials vary from home to home, Signature Hardware does not provide mounting hardware for all of our console sinks. The appropriate mounting hardware can be purchased from your local hardware store. For this installation it is assumed that any old fixtures have been removed and all rough-in work has been completed.

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures. Signature Hardware accepts no liability for any damage to the floor, walls, plumbing or for personal injury during installation.

TOOLS AND MATERIALS:

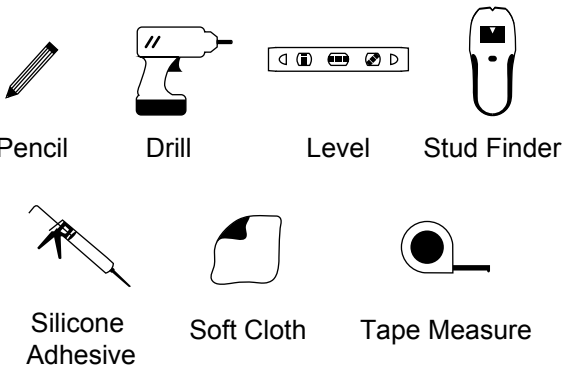

INSTALLATION

1. Hold the sink, with the porcelain legs in place, in the installation location and mark the wall through the mounting holes on the back of the sink.

Important: The sink should be anchored to two wall studs. Locate and mark the position of the wall studs to which you will fasten your sink by listening for a solid sound as you knock on the wall or by using a stud finder. If the studs in your bathroom do not line up to the mounting location for your sink, wood blocking can be installed between the studs using standard 2 x 4's. If wood blocking needs to be installed behind the finished wall, we recommend consulting a professional if you are unfamiliar with this type of installation.

2. Drill mounting holes for the anchor or lag bolts using the guides created in the previous step. If the wall is tile, use a masonry drill bit.

3. Secure the sink to the wall with the mounting hardware. After inserting the first fastener, verify that the sink is level. When the sink is properly aligned insert the remaining fasteners.

4. Run a bead of silicone adhesive along the top and bottom of each porcelain leg. Slide the legs in place beneath the sink.

5. Use a level to verify that each leg is perfectly straight.

6. Wipe away any excess silicone with a soft cloth.

7. Let silicone sealant dry for 24 hours before using your console sink. If a lavatory drain is included, move on to the Drain Installation section.

